




EPC for Onshore Processing Facilities and Associated Onshore Pipelines for Aung Sinkha Development Project (ASK) Phase 1A

DATASHEET FOR BARRED TEE

		刘斌	杨学礼		吕忠普	刘萍萍		
A1	2-Jul-26	LF	YYH	Issued for Review	LZL	LPP		
REV	DATE	MEC	PLR	DESCRIPTION	CHECK	APPR.	CHECK	APPR.
		BY			ENGINEERING APPROVAL		COMPANY APPROVAL	

REVISION CODE: A = Issued for Review – B = Issued for Approval – C = Approved for Construction

TOTAL OR PARTIAL AND / OR UTILIZATION OF THIS DOCUMENT ARE FORBIDDEN WITHOUT PRIOR WRITTEN AUTHORIZATION OF THE OWNER

	PTTEP INTERNATIONAL LIMITED		 
	EPC for Onshore Processing Facilities and Associated Onshore Pipelines for Aung Sinkha Development Project (ASK) Phase 1A		
	MM-ASK-1A-APL03-PLR-DTS-003	REV A1	



DOCUMENT NO. MM-ASK-1A-APL03-PLR-DTS-003
REVISION NO. A1
SHEET 2 of 4

Revision

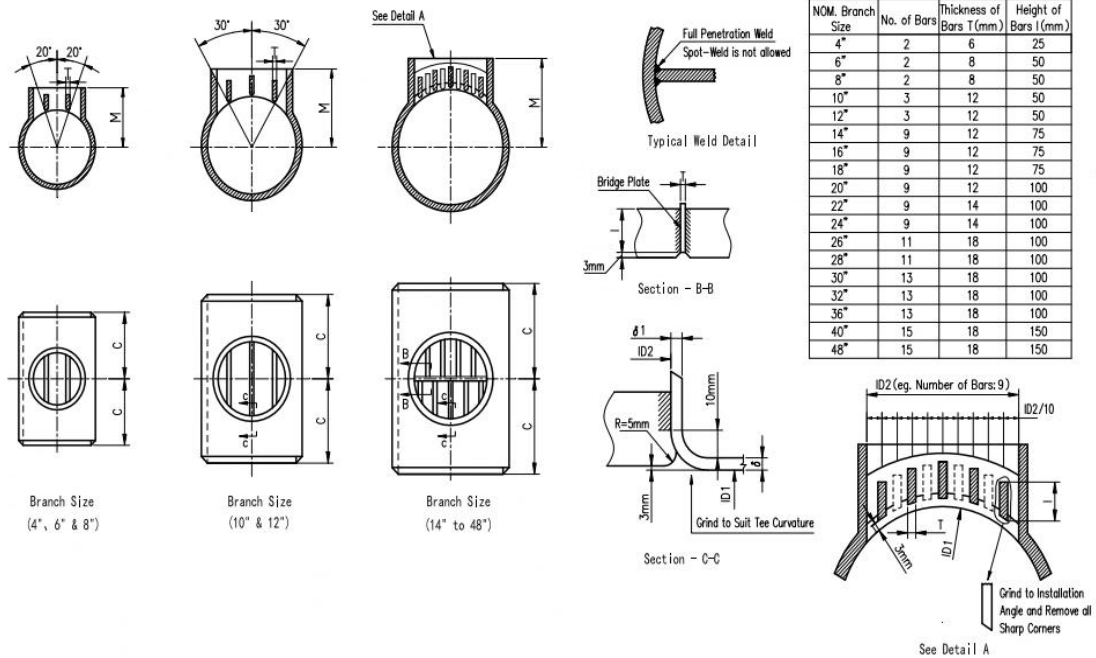
	PARAMETER	UNIT	VALUE	
1	GENERAL DESIGN DATA			
2	TAG NO.	-	BRT-31001	A1
3	LOCATION	-	APF	A1
4	QUANTITY	-	1	A1
5	DESIGN CODE	-	MSS-SP-75 and ASME B31.8 latest edition	A1
6	DESIGN PRESSURE	barg	153.2	A1
7	DESIGN TEMPERATURE (MIN. / MAX.)	°C	-29~70	A1
8	CORROSION ALLOWANCE (MAIN / BRANCH)	mm	3/3	A1
9	DESIGN LIFE (OPERATIONAL)	years	20	
10	DESIGN FACTOR	-	0.5	A1
11	PRESSURE CLASS RATING	-	#900	A1
12	SERVICE	-	Sale gas	A1
13	DIMENSIONS - SIZE	NPS	12" x 12" x 12"	A1
14	- WALL THICKNESS (MAIN / BRANCH)	mm	(NOTE 3)	A1
15	- HEIGHT OF BARS	mm	As per Figure 1	
16	- REFERENCE DRAWING	-	Figure 1	
17	BAR THICKNESS	mm	VTA (NOTE 4)	
18	DRY WEIGHT	kg	VTA	
19	WELD TEST RING	-	3 Pieces (NOTE 7)	
20	SURFACE PREPARATION AND COATING	-	As per 10008-STD-6-COR-003	A1
21	MATCHING PIPE			
22	DESIGN CODE		ASME B31.8 latest edition	A1
23	INSIDE DIAMETER (MAIN / BRANCH)	mm	323.9/323.9	A1
24	LINE PIPE WALL THK. (MAIN / BRANCH)	mm	15.9/17.48	A1
25	MATERIAL (MAIN / BRANCH)	-	API 5L PSL 2 X65 / ASTM A333 Gr 6 seamless	A1
26	CONNECTION TYPE	-	Butt-Welded	
27	PIPE ORIENTATION	-	Horizontal	
28	MATERIAL REQUIREMENTS (NOTE 5)			
29	TEE MATERIAL	-	ASTM A694 F65	
30	LINE PIPE MATERIAL	-	API 5L PSL 2 X65	A1
31	PLATE MATERIAL	-	ASTM A283	
32	INSPECTION AND TESTING REQUIREMENTS			
33	INSPECTION & TESTING	-	10008-STD-6-PLR-011 and MM-ASK-1A-APL01-PLR-SPE-0001	A1
34	NDT	-	100% in accordance with ASME BPVC SECTION V	
35	MILL HYDROTEST PRESSURE	barg	229.8	A1
36	TEST CERTIFICATE REQUIREMENTS	-	BS EN 10204 - TYPE 3.2, Note 5	A1
37	CHARPY V IMPACT TEST	-		
38	TEST TEMPERATURE	°C	-29	A1
39	ABSORBED ENERGY (MIN. AVERAGE)	J	54	
40	ABSORBED ENERGY (MIN. SINGLE)	J	40	
41	HARDNESS TEST	-	250HV10	



DOCUMENT NO. MM-ASK-1A-APL03-PLR-DTS-003
REVISION NO. A1
SHEET 3 of 4

Revision

	PARAMETER	UNIT	VALUE	
1	GENERAL DESIGN DATA			
2	TAG NO.	-	BRT-31002	A1
3	LOCATION	-	AMS01	A1
4	QUANTITY	-	1	A1
5	DESIGN CODE	-	MSS-SP-75 and ASME B31.8 latest edition	A1
6	DESIGN PRESSURE	barg	153.2	A1
7	DESIGN TEMPERATURE (MIN. / MAX.)	°C	-29~70	A1
8	CORROSION ALLOWANCE (MAIN / BRANCH)	mm	3/3	A1
9	DESIGN LIFE (OPERATIONAL)	years	20	
10	DESIGN FACTOR	-	0.5	A1
11	PRESSURE CLASS RATING	-	#900	A1
12	SERVICE	-	Sale gas	A1
13	DIMENSIONS - SIZE	NPS	12" x 12" x 12"	A1
14	- WALL THICKNESS (MAIN / BRANCH)	mm	(NOTE 3)	
15	- HEIGHT OF BARS	mm	As per Figure 1	A1
16	- REFERENCE DRAWING	-	Figure 1	
17	BAR THICKNESS	mm	VTA (NOTE 4)	
18	DRY WEIGHT	kg	VTA	
19	WELD TEST RING	-	3 Pieces (NOTE 7)	
20	SURFACE PREPARATION AND COATING	-	As per 10008-STD-6-COR-003	A1
21	MATCHING PIPE			
22	DESIGN CODE		ASME B31.8 latest edition	A1
23	INSIDE DIAMETER (MAIN / BRANCH)	mm	323.9/323.9	A1
24	LINE PIPE WALL THK. (MAIN / BRANCH)	mm	15.9/17.48	A1
25	MATERIAL (MAIN / BRANCH)	-	API 5L PSL 2 X65 / ASTM A333 Gr 6 seamless	A1
26	CONNECTION TYPE	-	Butt-Welded	
27	PIPE ORIENTATION	-	Horizontal	
28	MATERIAL REQUIREMENTS (NOTE 5)			
29	TEE MATERIAL	-	ASTM A694 F65	
30	LINE PIPE MATERIAL	-	API 5L PSL 2 X65	A1
31	PLATE MATERIAL	-	ASTM A283	
32	INSPECTION AND TESTING REQUIREMENTS			
33	INSPECTION & TESTING	-	10008-STD-6-PLR-011 and MM-ASK-1A-APL01-PLR-SPE-0001	A1
34	NDT	-	100% in accordance with ASME BPVC SECTION V	
35	MILL HYDROTEST PRESSURE	barg	229.8	A1
36	TEST CERTIFICATE REQUIREMENTS	-	BS EN 10204 - TYPE 3.2, Note 5	A1
37	CHARPY V IMPACT TEST	-		
38	TEST TEMPERATURE	°C	-29	A1
39	ABSORBED ENERGY (MIN. AVERAGE)	J	54	
40	ABSORBED ENERGY (MIN. SINGLE)	J	40	
41	HARDNESS TEST	-	250HV10	

TYPICAL DRAWING
FIGURE 1: TYPICAL BARRED TEE DETAILS

NOTES:

- 1 VTA = VENDOR to advise.
- 2 All barred tee's shall be suitable for pigging operations. The VENDOR shall verify the internal diameter of each fabricated barred tee in order to match internal diameter of the connecting pipe. The minimum internal diameter of the completed barred tees shall be confirmed for smooth passage of pigs by passing an internal gauge through the full length of the bore. **The pig gauge shall have 2 equispaced and parallel 6 mm thick aluminium circular plates, each at least 96% of, or 4 mm less than, the internal nominal bore of the matching line pipe, whichever is the greater, separated by a rigid bar of total length once the specified Nominal ID**
- 3 The minimum wall thickness of barred tee shall not be less than the connecting pipe. The wall thickness shall be calculated and guaranteed by VENDOR. The design shall be adequate for test pressure.
- 4 Bar thickness in Figure 1 is preliminary only. VENDOR to advise the actual thickness based on vibration analysis, but must not be less than 1/2". The bar shall be full penetration welded before final heat treatment. The analysis shall be submitted for review.
- 5 All materials shall be supplied with mill test certificates. **Material traceability shall be in accordance with 10008-STD-6-GEN-007 "Material Traceability".**
- 6 All welds, welding procedure qualifications, and welder qualifications shall be strictly in accordance with ASME BPVC Section IX, API Standard 1104, 10008-STD-6-PLR-011, and MM-ASK-1A-APL01-PLR-SPE-0001.
- 7 VENDOR shall provide 3 pieces of weld test rings (350 mm length) for each heat no. of barred tee material.
- 8 Barred tee to be supplied with a **SS 316L** tag stamped securely fixed to the body of the tee. the tag nos. shall be in upper case, sans serif font of size minimum 4mm, black in colour, and on white background.
- 9 VENDOR shall provide design calculations using non-linear Finite Element Analysis as per ASME VIII, Division 2, Appendix 4 or an approved equivalent standard, together with fabrication drawings, all for for **CONTRACTOR/COMPANY** review and approval.
- 10 Inside surfaces of bars / welds shall be ground smooth.